


12AY7/6072

R. F. DOUBLE TRIODE




Base: NOVAL

$U_f = 6,3 \text{ or } 12,6 \text{ V}$
 $I_f = 300 \text{ or } 150 \text{ mA}$

Typical Characteristics:

$U_a = 250 \text{ V}$
 $U_g = -4 \text{ V}$
 $I_a = 3,0 \text{ mA}$
 $S = 1,75 \text{ mA/V}$
 $R_i = 22,8 \text{ k}\Omega$
 $\mu = 40$

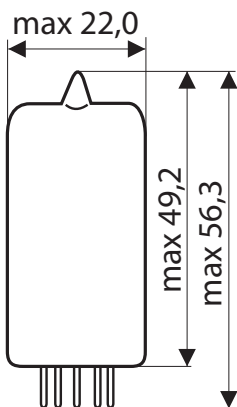

Limiting Values:

$U_a = 300 \text{ V}$
 $U_g = -50 \text{ V}$
 $W_a = 1,5 \text{ W}$
 $U_{k/f} = \pm 90 \text{ V}$
 $I_k = 10 \text{ mA}$

Capacitances:

	system I.	system II.	
$C_{g/k} = 1,6$	1,6	1,6	pF
$C_a = 0,33$	0,33	0,33	pF
$C_{g/a} = 1,7$	1,7	1,7	pF



TRANSFER CHARACTERISTICS

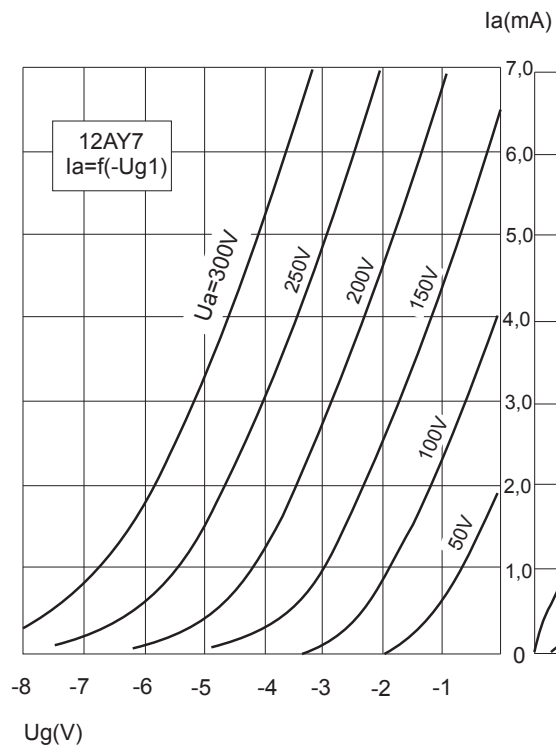


PLATE CHARACTERISTICS

